

GEKO

Self-Managed Security Portal with sliding door



Self-Managed Security Portal with sliding doors and high discriminating metal detector built into the structure.
Single passage checking system for entrance and anti-hostage system for exit.
Fully programmable by the user.

AutTech
Automation Ideas and Solutions

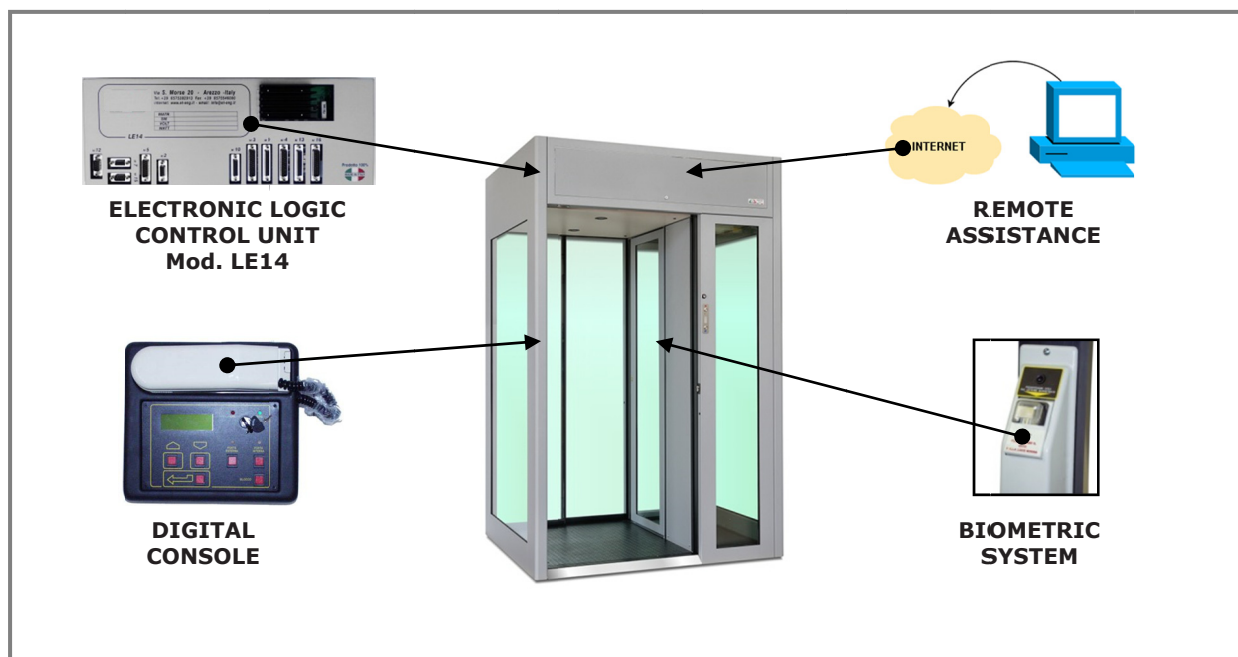

100% made in Italy

GENERAL FEATURES

- Monobloc made up of 30/10 mild steel electro-welded structure painted with highly shock-and-corrosion-proof products.
- Embossed painting, any color from RAL Chart or stainless steel coating.
- Bullet-proof laminated side glasses.
- Bullet-proof and shock-proof laminated door glasses.
- 24Vdc Motors with Reversible Gearbox and Electric Brake.
- Electronic logic control unit - single board - mod. LE14 - with speech synthesizer with programmable multimessages.
- Ethernet connection for tele-assistance (TCP/IP Protocol).
- Accident prevention at 3 levels complying with existing regulations.
- Adjustable weight control system allowing only one transit at a time (Option).
- Self-management by special sensor mod. Argo (Option).
- Inside cage fully controlled able to detect objects below 250g (programmable).
- Signaling lights for user's guidance.
- Internal lighting by LED spotlight, Speech synthesizer, Intercom and emergency button.
- High discriminating Metal Detector mod. SDM4/14-P400 built into the structure.
- Control console for operation managing (entrance, exit, bidirectional, manual, emergency, etc.), complete with intercom receiver.
- Interfacing with external peripherals, card readers, biometric systems, etc.
- It can be set into the floor (up to 40 mm).

ACCESSORIES

- Radar Sensors for door automatic opening.
- Biometric Recording System mod. Bio-Print.
- Anti-camouflage Recording System mod. Bio-Visual.



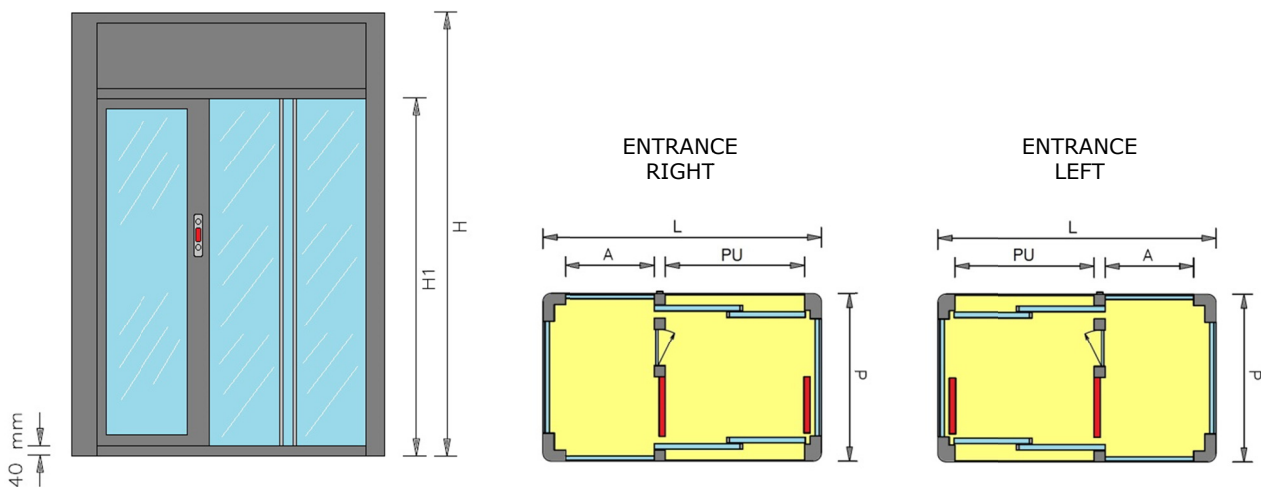
BASIC EQUIPMENT

- Monobloc made up of 30/10 mild steel structure in compliance with the requirements set by the ENV 1627-class 4 regulation for burglary resistance.
- Embossed painting, any color from RAL Chart.
- Side Glasses - 19/21 mm (BR2/S UNI EN1063 – P6B UNI EN 356).
- Door Glasses - 19/21 mm (BR2/S UNI EN1063 – P6B UNI EN 356).
- Electronic logic control unit - single board – mod. LE14 – with speech synthesizer with programmable multimessages, feeder/battery-charger and emergency batteries.
- Ethernet connection for tele-assistance (TCP/IP Protocol).
- 24VDC Motors with Reversible Gearbox and Electric Brake.
- Metal Detector mod. SDM4/14-P400.
- Accident prevention at 3 levels.
- Person Presence Sensor.
- Internal lighting by LED spotlight, Speech synthesizer, Intercom and emergency button.
- Semaphores mod. P07.
- Intercom system.
- Analogic managing console.
- Operation programmable by managing console.

TECHNICAL FEATURES

- Power supply : 100-240Vac / 50-60Hz.
- 200 Watt absorption.
- Temperature range : -20°C/+70°C.
- Emergency Buffer Batteries : (12V – 18Ah) with 4 hours of continuous operation.
- CE Certification, Machinery Directive 2006/42/CE.
- Electromagnetic Compatibility 2014/30/UE.
- Low voltage security 2014/35/UE.
- Weight : 750 - 950 kg.
- Transit speed : 6 pass./min.

In case of EMERGENCY, it is possible to open the doors by hand, no matter which operation mode is set.



MODEL	HT (mm)	HU (mm)	L (mm)	P (mm)	PU (mm)	A (mm)
T01	2400	2000	1230	1080	720	330
T02	2400	2000	1500	1300	900	490