


SDM4-TH

Walk-through metal detector with indoor configuration

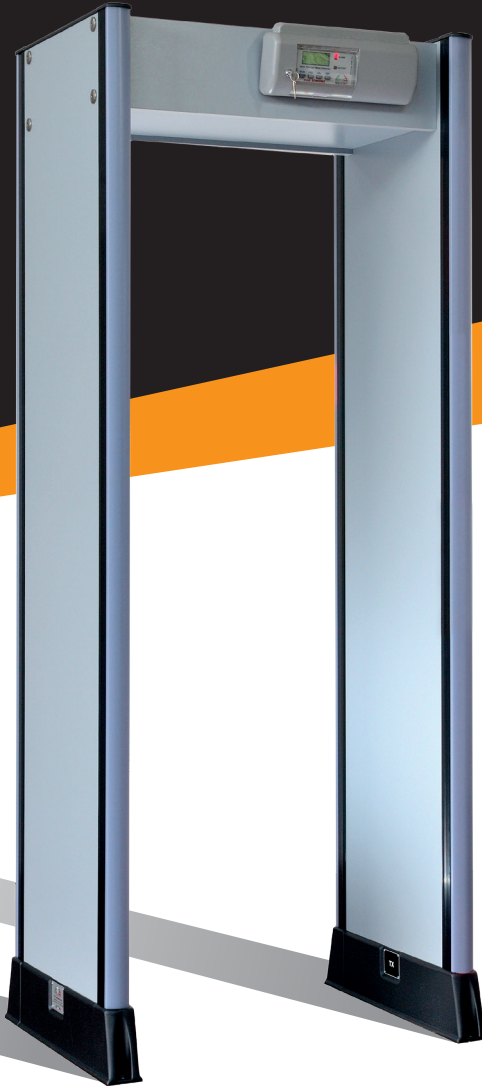

Light size and weight.

Large visual control display.

Entirely programmable by keyboard.

High immunity to electromagnetic noise.

Automatic synchronization between two or more metal detectors.

Excellent discrimination between personal items and weapons.

Waterproof base for anchoring to the floor.

SDM4-TH Walk-through metal detector with indoor configuration

ELECTRONIC CONTROLLER

Shockproof thermo-moulded ABS case (IP20).
 Feeder with input voltage 100-240Vac 50-60Hz.
 Feeding voltage 24Vdc.
 Electrical absorption 30Watt.
 Sampling Frequency 5 kHz.
 Temperature range -20°C +70°C.
 Non condensed relative humidity 0-95%.
 Excellent discrimination between personal items and weapons.
 Immunity to electromagnetic noise.
 Programming via keypad.
 Viewing configuration settings via LCD.
 Safety key for access to programming.
 Self-diagnosis system.
 Storage parameters via solid state memory.
 Incorporated RS232 serial interface board.

Optional
 Feeder with battery charger with input voltage 100-240Vac 50-60Hz.
 Auxiliary buffer batteries 4 hours autonomy
 Ethernet Network Connection by means of an external module.
 Remote Management Software (Windows O.S.).

GENERAL SPECIFICATIONS

Two password levels (User – Super User).
 Automatic synchronization between two or more metal detectors (with no connecting cables).
 Waterproof base for fastening on the floor.
 No starting calibration.
 Control for sabotage prevention.
 All parameters programmable.
 Little maintenance.
 LCD display for programming function indication.
 General external background noise measurement proportional to the threshold set.
 External electromagnetic noise measurement proportional to the threshold set.
 100 sensitivity levels.
 06 amplification levels.
 100 object detecting speed values.
 20 analysis values.
 100 manual frequency searching values.
 20 programs which can be personalized.
 Filters inserting by programming.
 100 acoustic intensity levels.
 100 alarm time levels.
 200 volume levels.

Optional
 Metal samples test (OTP). Designed according to the standards FAA 3.

ALARMS INDICATORS


Visual alarm through Red LED and LCD.
 Audible Alarm adjustable in duration, frequency and tone.
 Visual indicator of alarm status and operating status.
 Visual indicator for Battery feed.

Optional
 Remote signalling unit.
 Infrared sensors for step counter.
 Wheeled mobility kit.

CERTIFICATIONS

Harmless to magnetic supports (floppy disk, tapes, credit cards, etc).
 Complies with Regulations relating to human exposure to electromagnetic fields and safety for pacemaker users.
 In compliance with NILECJ-0601.02 standards all levels.
 In compliance with "3 GUN TEST" FAA standards.
 In compliance with CE standards.
 ISO9001 Quality Control Procedures.

DIMENSIONS

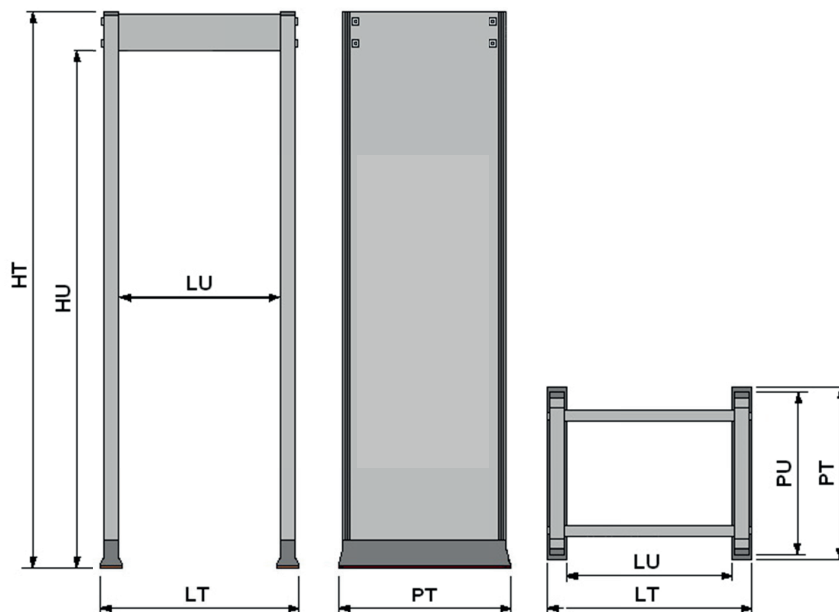

Transducer Model	HT (mm)	HU (mm)	LT (mm)	LU (mm)	PT (mm)	PU (mm)
P500TH	2200	2000	850	720	600	510
P500TH-L	2200	2000	890	760	600	510